

描述 / Descriptions

TO-277 塑封封装 肖特基二极管。
TO-277 Plastic package Schottky diode .


特征 / Features

高正向浪涌能力，超低正向压降 $V_F(\text{typ})=0.26\text{V}$ ，优异的高温稳定性。无卤产品。
High Forward Surge Capability, Ultra Low Forward Voltage Drop $V_F(\text{typ})=0.26\text{V}$, Excellent High Temperature Stability. HF Product.

用途 / Applications

用于高频、低压、大电流整流二极管，续流二极管，保护二极管。
For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications.


内部等效电路 / Equivalent Circuit



引脚排列 / Pinning



PIN1 : Anode PIN 2 : Cathode PIN 3 : Anode

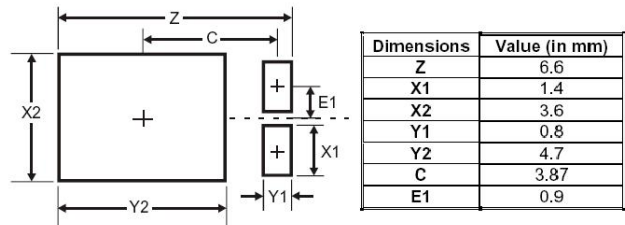

Suggested Pad layout

放大及印章代码 / h_{FE} Classifications & Marking

见印章说明。 See Marking Instructions.

极限参数 / Absolute Maximum Ratings(Ta=25°C)

参数 Parameter	符号 Symbol	数值 Rating	单位 Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage Peak Reverse Voltage	V_{RRM} V_{RWM} V_{RM}	60	V
RMS Reverse voltage	$V_{R(RMS)}$	42	V
Average Rectified Output Current	I_O	20	A
Non-Repetitive Peak Forward Surge Current	I_{FSM}	300	A
Junction Temperature Range	$T_{j MAX}$	150	°C
Storage Temperature Range	T_{stg}	-55~150	°C
Thermal Resistance Junction-Ambient	$R_{\theta JA}$ (Note 1)	73	°C/W





电性能参数 / Electrical Characteristics(Ta=25°C)

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Reverse Voltage	V_R	$I_R=0.3mA$	60			V
Forward voltage	V_F	$I_F=3A$ $T_J=25^\circ C$		0.34	0.42	V
		$I_F=3A$ $T_J=125^\circ C$		0.26		V
		$I_F=20A$ $T_J=25^\circ C$		0.52	0.60	V
		$I_F=20A$ $T_J=125^\circ C$		0.52		V
Instantaneous Reverse Current	I_R (Note 2)	$V_R=60V$ $T_J=25^\circ C$		0.1	0.3	mA
		$V_R=40V$ $T_J=85^\circ C$		1.7	5	mA
		$V_R=60V$ $T_J=125^\circ C$			100	mA

注/Notes:

- FR-4 PCB, 2盎司铜, 最低建议焊盘布局。/FR-4 PCB, 2oz. Copper, minimum recommended pad layout per.
- 使用极短的脉冲测试时间, 以尽量减少自热效应。/Short duration pulse test used to minimize self-heating effect.

电参数曲线图 / Electrical Characteristic Curve

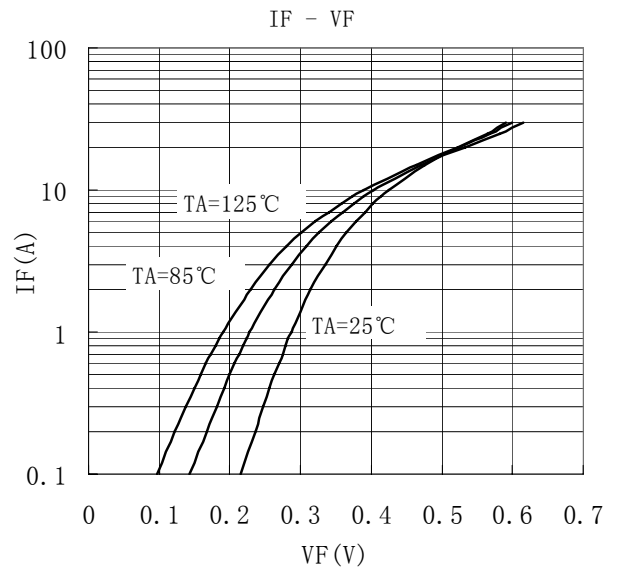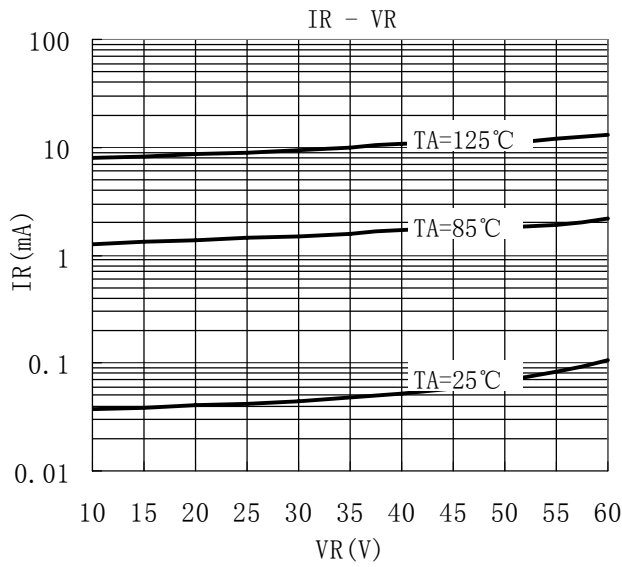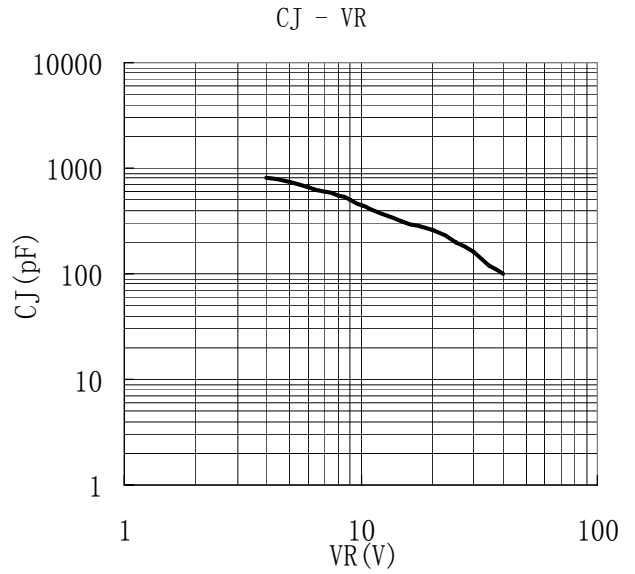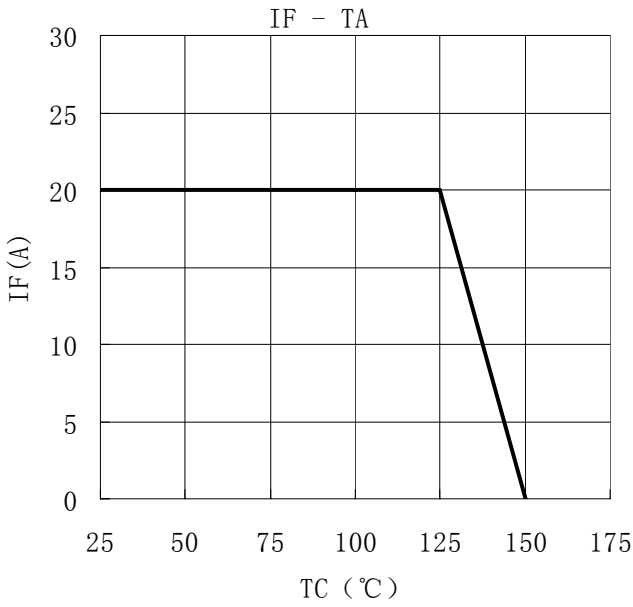

外形尺寸图 / Package Dimensions



印章说明 / Marking Instructions



说明：

2060： 为型号代码


****： 为生产批号代码，随生产批号变化。

Note:

2060： Product Type.

****: Lot No. Code, code change with Lot No.

回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)

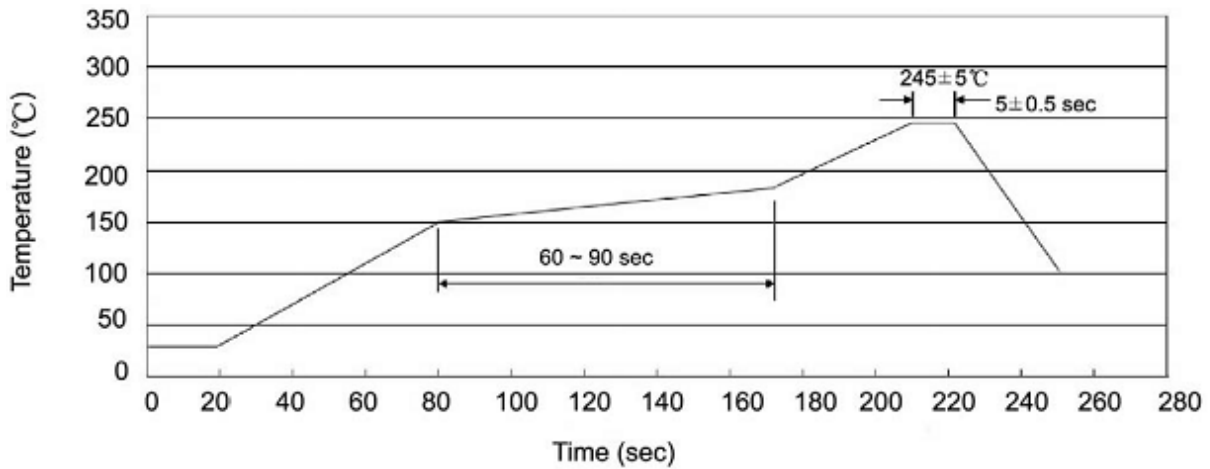

说明：

- 1、预热温度 150~180°C，时间 60~90sec;
- 2、峰值温度 245±5°C，时间持续为 5±0.5sec;
- 3、焊接制程冷却速度为 2~10°C/sec.

Note:

- 1.Preheating:150~180°C, Time:60~90sec.
- 2.Peak Temp.:245±5°C, Duration:5±0.5sec.
3. Cooling Speed: 2~10°C/sec.

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

温度：260±5°C 时间：10±1 sec.

Temp.:260±5°C Time:10±1 sec

包装规格 / Packaging SPEC.

卷盘包装 / REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
TO-277	5,000	3	15,000	6	90,000	13" ×12	360×360×50	380×334×366

使用说明 / Notices